

vertisol

BAMBOO



Translucent



Cold-cut, crush-cut or ultrasonic



Manufactured in the EU



Acoustic absorption

TECHNICAL PROPERTIES

Fabric Characteristic	Standard	
Composition	-	100 % PES
Weight (g/ m ²)		261 ± 5%
Thickness (mm)		0.42 ± 5%
Light fastness	ISO 105 B02:2002 (blue Scale)	White 4 Other colours ≥ 6
Roll size		Width 200–250cm, Length 30 m
Environmental & health properties	Oeko-tex standard 100 certified	
Manufacturing properties	Always stores rolls horizontally Cold cut, crush cut or ultrasonic Manufacturing direction panel blinds only 'drop to length' : ↓	
Maintenance	Do not rub Do not steam Wipe gently with a wet sponge Vacuum clean for regular maintenance	
Acoustic Absorption	UNE EN ISO 10534:2 Measured with 150 mm air chamber	$\alpha_w = 0.75 (L)^*$ NRC = 0.74**

RANGE OF COLOURS 2022

White

Ivory


Walnut

* Calculated according to EN ISO 11654

** Calculated according to ASTM C-423.



Roller and PanelBlinds

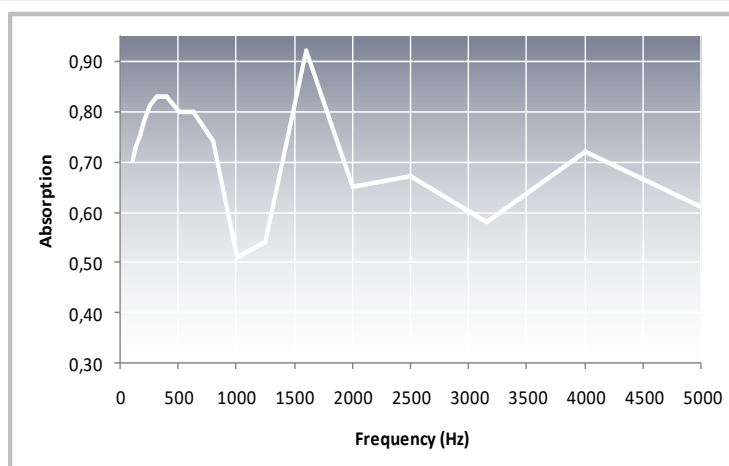

All specifications are based on average values and may deviate. The values are given for guidance and are not contractual. Subject to technical modifications

vertisol

VERTISOL INT'L SRL
C/Galileu Galilei, 68
08403 Granollers
SPAIN
T: + 34 93 840 1444
www.vertisol.com



ISO 9001:2015 and
ISO 14001:2015
certified company

Ed 7 06/06/2023